
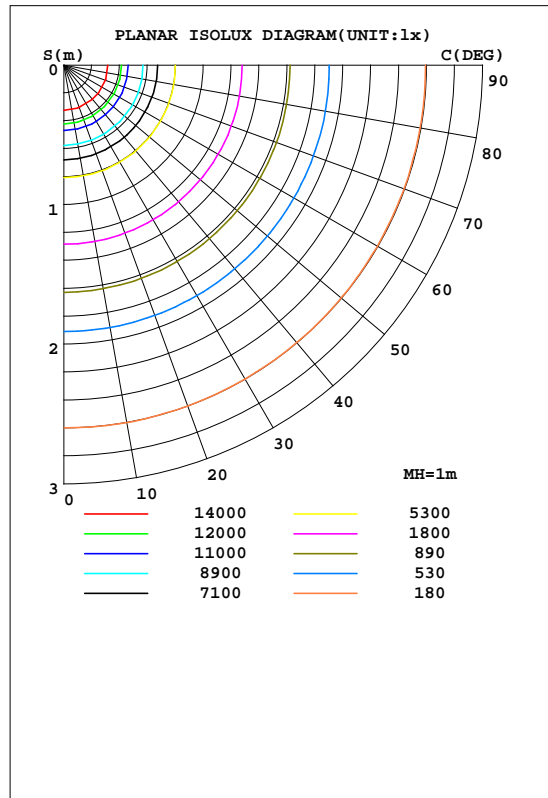


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-------------------|---------------------|
| Test:U:232.0V I:1.324A P:298.0W PF:0.9712 Lamp Flux:44170x1 lm | | |
| NAME: B1000-50SK | TYPE:B1000-50SK-B | WEIGHT: / |
| SPEC.: / | DIM.: / | SERIAL No.: |
| MFR.: | SUR.:/ | PROTECTION ANGLE: / |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 148.2 lm/W | | | |
|------------------|------------|----------------------------------|--------|--------------------|-----------|
| MODEL | B1000-50SK | I _{max} (cd) | 17842 | S/MH(C0/180) | 1.15 |
| NOMINAL POWER(W) | 298.0 | LOR(%) | 100.0 | S/MH(C90/270) | 1.15 |
| RATED VOLTAGE(V) | 230 | TOTAL FLUX(lm) | 44170 | h UP, DN(C0-180) | 1.3, 48.4 |
| NOMINAL FLUX(lm) | 44170 | CIE CLASS | DIRECT | h UP, DN(C180-360) | 1.2, 49.1 |
| LAMPS INSIDE | 1 | h up(%) | 2.6 | CIBSE SHR NOM | 1.25 |
| TEST VOLTAGE(V) | 230 | h down(%) | 97.4 | CIBSE SHR MAX | 1.30 |

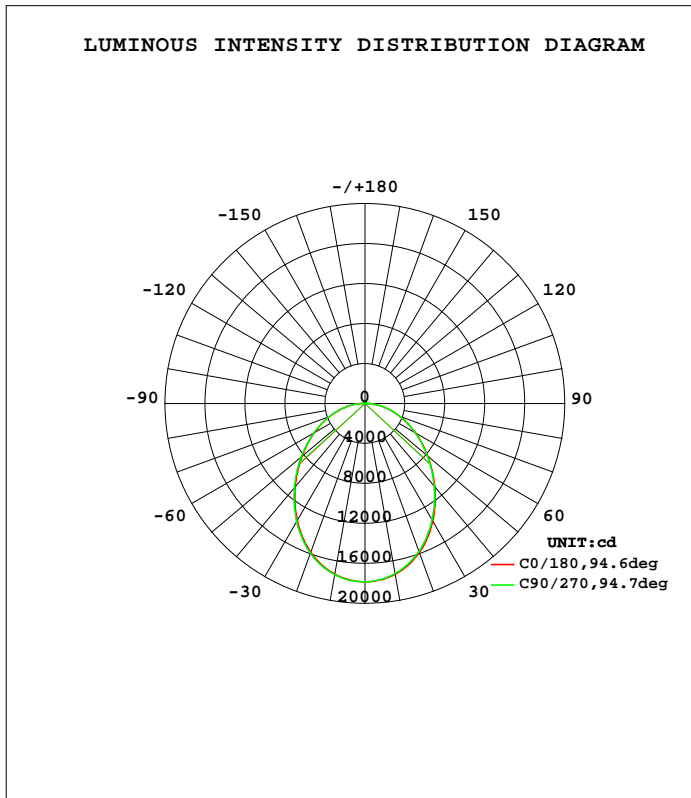

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]