
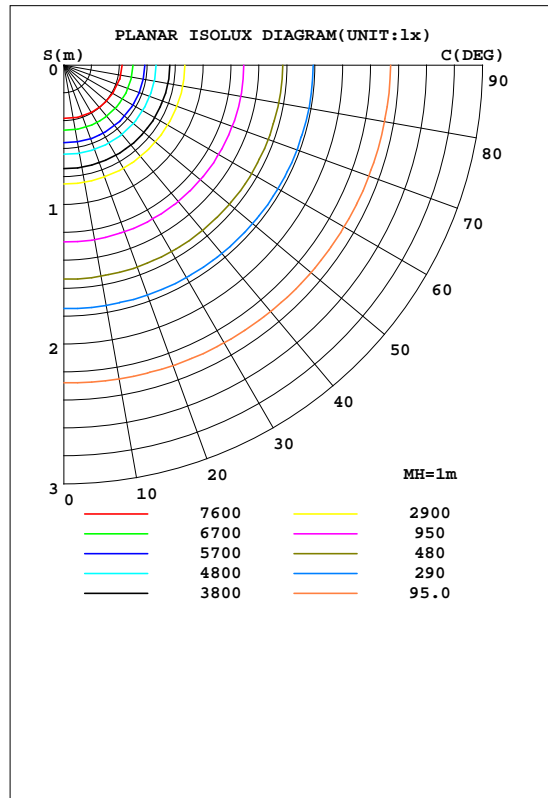


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:200.1V I:0.7980A P:150.0W PF:0.9691 Lamp Flux:22790x1 lm		
NAME: B700-50HK	TYPE:B700-50HK-B	WEIGHT:/
SPEC.:/	DIM.: /	SERIAL No.:
MFR.:	SUR.:/	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.9 lm/W			
MODEL	B700-50HK	I _{max} (cd)	9983	S/MH(C0/180)	1.25
NOMINAL POWER(W)	150.0	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	200	TOTAL FLUX(lm)	22790	h UP, DN(C0-180)	1.3, 49.9
NOMINAL FLUX(lm)	22790	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.4, 47.4
LAMPS INSIDE	1	h up(%)	2.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	200	h down(%)	97.3	CIBSE SHR MAX	1.35

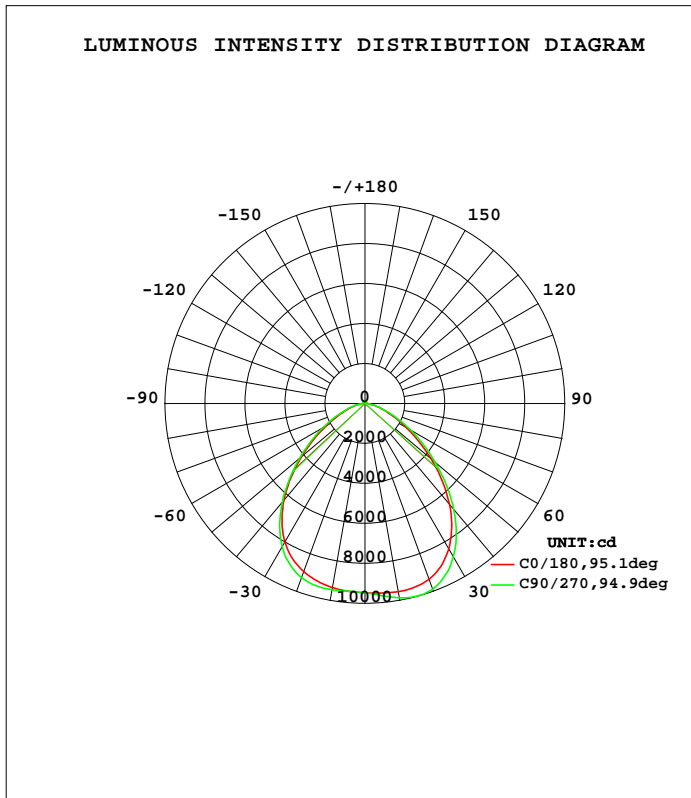

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=0.9800]