
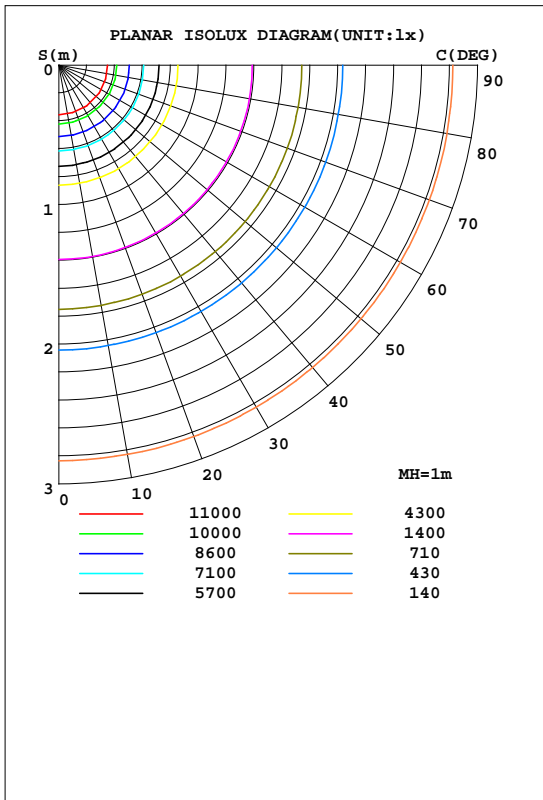


**EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT**

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:225.0V I:1.347A P:298.0W PF:0.9726 Lamp Flux:43740x1 lm		
NAME: C1000-50Dk	TYPE:C1000-50Dk-C	WEIGHT:/
SPEC.:/	DIM.:/	SERIAL No.:
MFR.:	SUR.:/	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.7 lm/W			
MODEL	C1000-50Dk	I <sub>max</sub> (cd)	14314	S/MH(C0/180)	1.23
NOMINAL POWER(W)	298.0	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	43740	h UP, DN(C0-180)	2.4, 47.2
NOMINAL FLUX(lm)	43740	CIE CLASS	DIRECT	h UP, DN(C180-360)	2.5, 47.9
LAMPS INSIDE	1	h up(%)	4.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	h down(%)	95.1	CIBSE SHR MAX	1.35

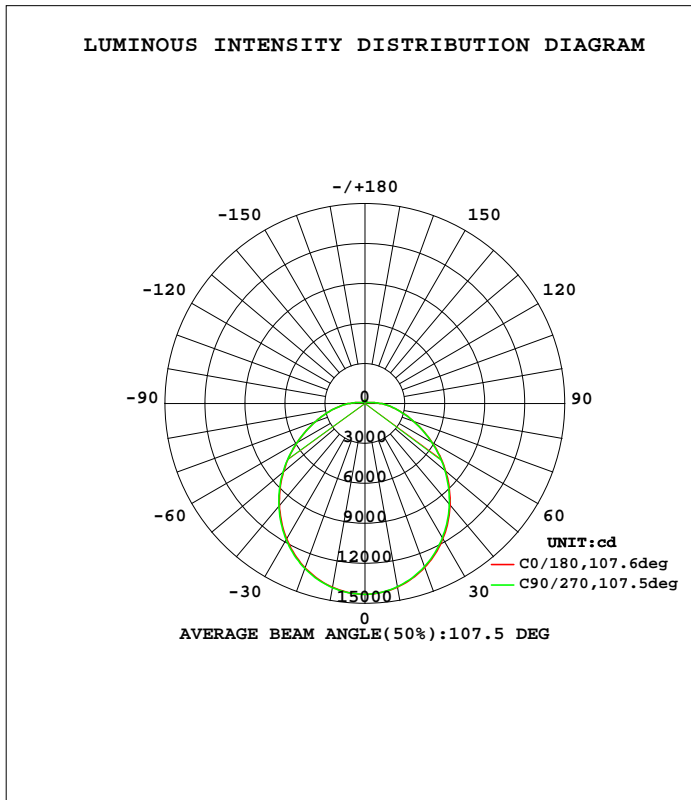

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Liuyanping

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.288  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]