
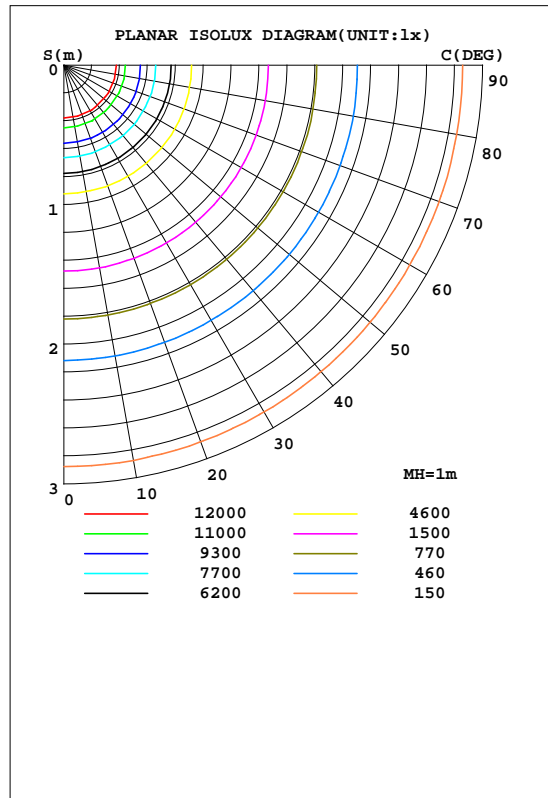


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|--|-------------------|--------------------|
| Test:U:231.1V I:1.325A P:298.0W PF:0.9738 Lamp Flux:48640x1 lm | | |
| NAME: C1000-50DT | TYPE:C1000-50DT-C | WEIGHT:/ |
| SPEC.:/ | DIM.: / | SERIAL No.: |
| MFR.: | SUR.:/ | PROTECTION ANGLE:/ |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 163.2 lm/W | | | |
|------------------|------------|----------------------------------|--------|--------------------|-----------|
| MODEL | C1000-50DT | I _{max} (cd) | 15570 | S/MH(C0/180) | 1.33 |
| NOMINAL POWER(W) | 298.0 | LOR(%) | 100.0 | S/MH(C90/270) | 1.34 |
| RATED VOLTAGE(V) | 230 | TOTAL FLUX(lm) | 48640 | h UP, DN(C0-180) | 1.5, 47.6 |
| NOMINAL FLUX(lm) | 48640 | CIE CLASS | DIRECT | h UP, DN(C180-360) | 1.4, 49.5 |
| LAMPS INSIDE | 1 | h up(%) | 2.9 | CIBSE SHR NOM | 1.50 |
| TEST VOLTAGE(V) | 230 | h down(%) | 97.1 | CIBSE SHR MAX | 1.50 |

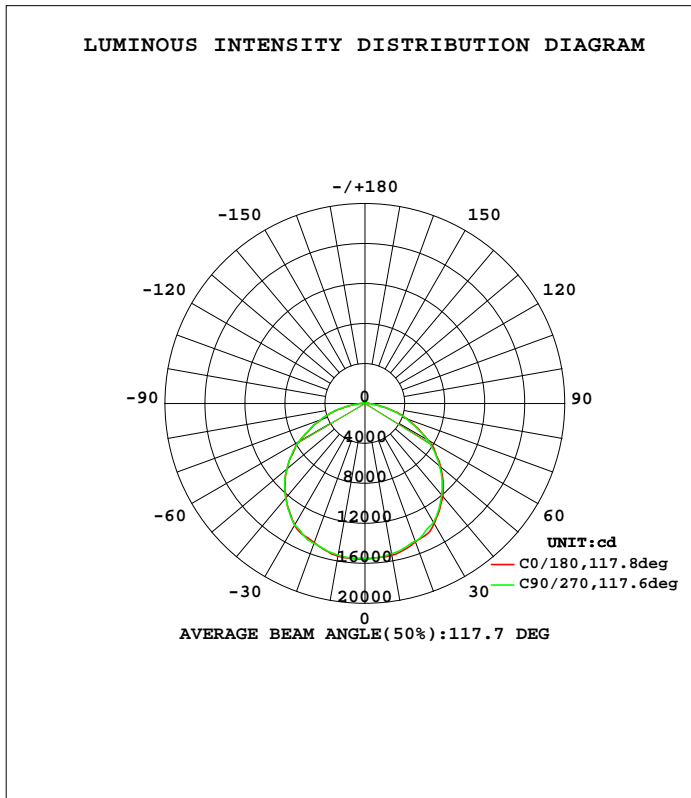

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]