

品名 : 低温倉庫専用LED照明

品番 : ICE-400-50RT


光源光束 : 10000lm

器具効率 : 1.00

定格光束 : 10000lm

(器具光束)


光源光束1000lmあたり

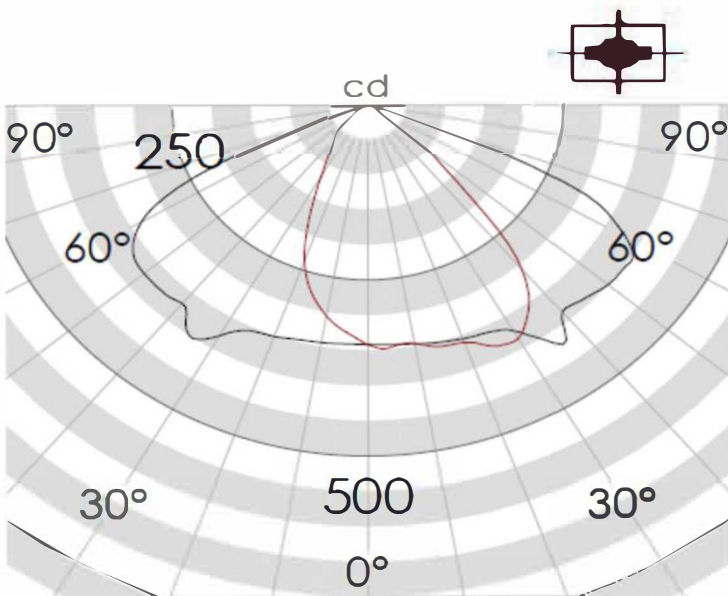

ICE-400-50RT (10000lm 80.0W) CD21

[cd/光源光束1000lm]

| | 0° | 90° | 180° |
|------|--------|--------|--------|
| 0° | 341.47 | 341.08 | 341.66 |
| 5° | 346.35 | 342.74 | 324.57 |
| 10° | 345.08 | 345.77 | 305.43 |
| 15° | 356.41 | 350.16 | 277.40 |
| 20° | 360.61 | 354.85 | 235.98 |
| 25° | 379.46 | 358.46 | 176.11 |
| 30° | 384.84 | 371.94 | 118.87 |
| 35° | 357.98 | 415.12 | 85.37 |
| 40° | 306.31 | 385.23 | 68.57 |
| 45° | 182.55 | 390.99 | 59.19 |
| 50° | 98.55 | 399.88 | 37.90 |
| 55° | 18.36 | 401.93 | 19.73 |
| 60° | 14.16 | 380.44 | 17.00 |
| 65° | 13.97 | 307.09 | 14.26 |
| 70° | 12.40 | 102.17 | 13.09 |
| 75° | 17.19 | 15.52 | 10.26 |
| 80° | 9.18 | 6.05 | 7.81 |
| 85° | 6.54 | 3.60 | 6.64 |
| 90° | 2.05 | 1.63 | 1.76 |
| 95° | 0.39 | 0.80 | 0.29 |
| 100° | 0.00 | 0.77 | 0.00 |
| 105° | 0.00 | 1.06 | 0.00 |
| 110° | 0.00 | 0.43 | 0.00 |
| 115° | 0.00 | 0.38 | 0.00 |
| 120° | 0.00 | 0.35 | 0.00 |
| 125° | 0.10 | 0.33 | 0.10 |
| 130° | 0.10 | 0.29 | 0.10 |
| 135° | 0.10 | 0.29 | 0.20 |
| 140° | 0.10 | 0.36 | 0.29 |
| 145° | 0.20 | 0.47 | 0.39 |
| 150° | 0.29 | 0.61 | 0.59 |
| 155° | 0.39 | 0.65 | 0.68 |
| 160° | 0.49 | 0.65 | 0.59 |
| 165° | 0.59 | 0.66 | 0.68 |
| 170° | 0.68 | 0.75 | 0.78 |
| 175° | 0.78 | 0.80 | 0.78 |
| 180° | 0.68 | 0.70 | 0.68 |

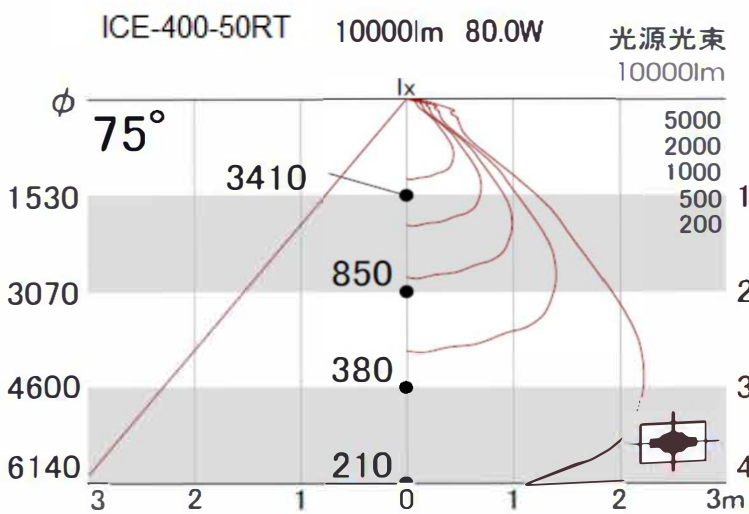

ICE-400-50RT (10000lm 80.0W) A11