
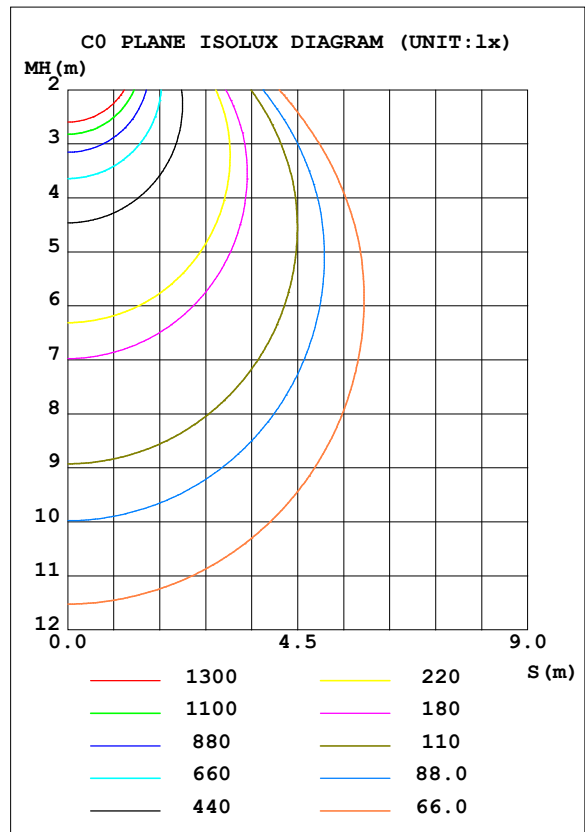


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.49V I:0.6725A P:143.0W PF:0.9641 Freq:49.99Hz UTHDi:0% ITHDi:0% Lamp Flux:25240 lm		
NAME: ICE-A700-50RT	TYPE: 3030	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 176.5 lm/W			
MODEL	ICE-A700-50RT	I _{max} (cd)	8683	S/MH (C0/180)	1.31
NOMINAL POWER (W)	143.0	LOR (%)	100.0	S/MH (C90/270)	1.30
RATED VOLTAGE (V)	88.0609	TOTAL FLUX (lm)	25240	η UP, DN (C0-180)	0.3, 50.1
NOMINAL FLUX (lm)	25240	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 49.3
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	220	η down (%)	99.4	CIBSE SHR MAX	1.50

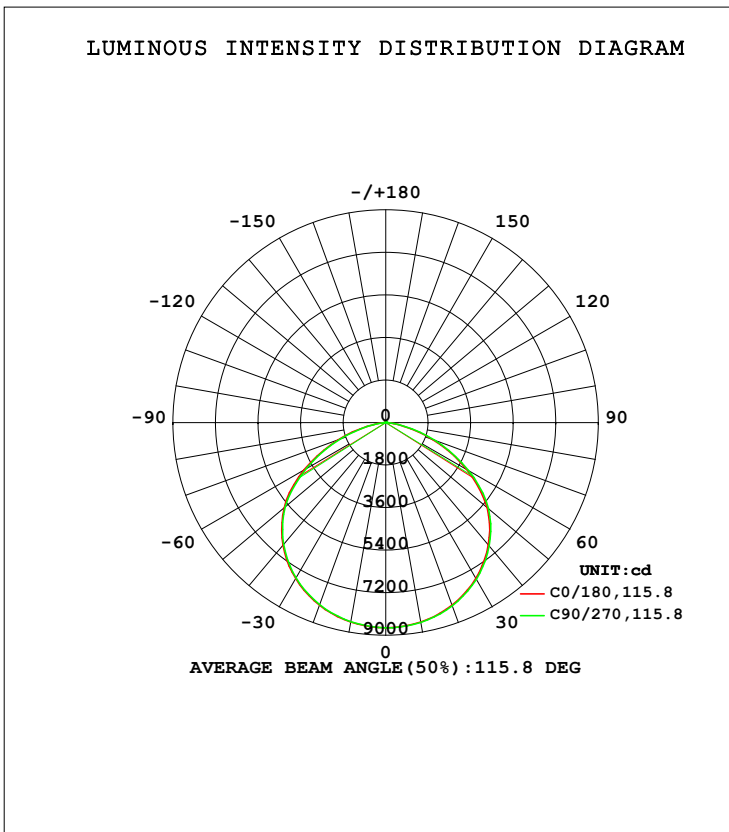

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-05-13

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 3.770m [K=1.0000]
 Remarks: