
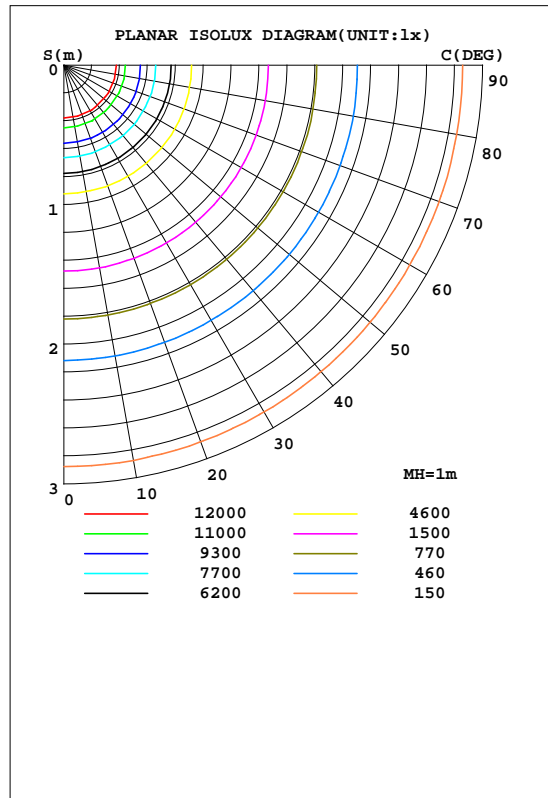


**EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT**

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:231.1V I:1.325A P:296.0W PF:0.9738 Lamp Flux:47670 lm		
NAME: K1000-50DT	TYPE:5630	WEIGHT:/
SPEC.:/	DIM.: /	SERIAL No.:
MFR.:	SUR.:/	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 161.0 lm/W			
MODEL	K1000-50DT	I <sub>max</sub> (cd)	15570	S/MH(C0/180)	1.33
NOMINAL POWER(W)	296.0	LOR(%)	100.0	S/MH(C90/270)	1.34
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	47670	h UP,DN(C0-180)	1.5,47.6
NOMINAL FLUX(lm)	47670	CIE CLASS	DIRECT	h UP,DN(C180-360)	1.4,49.5
LAMPS INSIDE	1	h up(%)	2.9	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	230	h down(%)	97.1	CIBSE SHR MAX	1.50

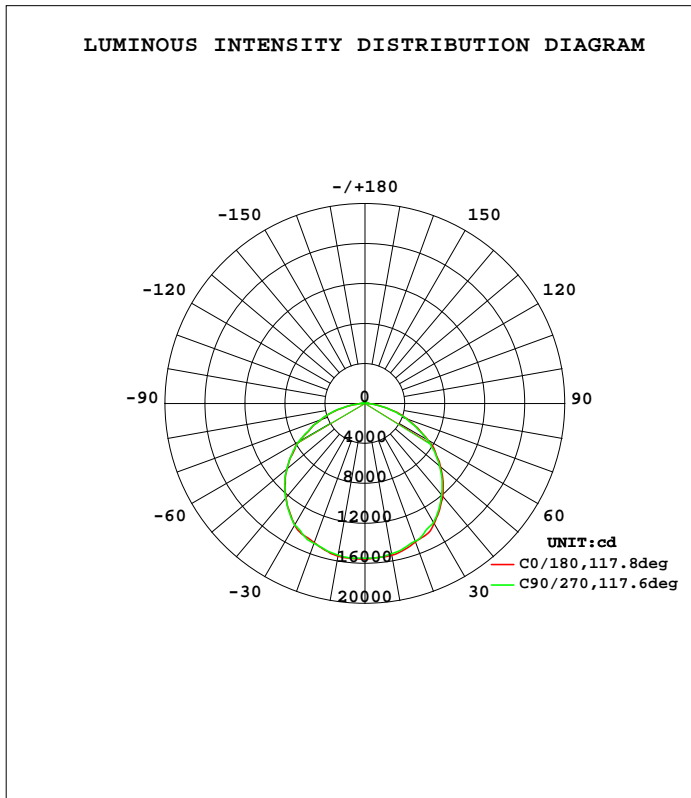

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Liuyanping  
 Date:2023-09-14

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.288  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]