
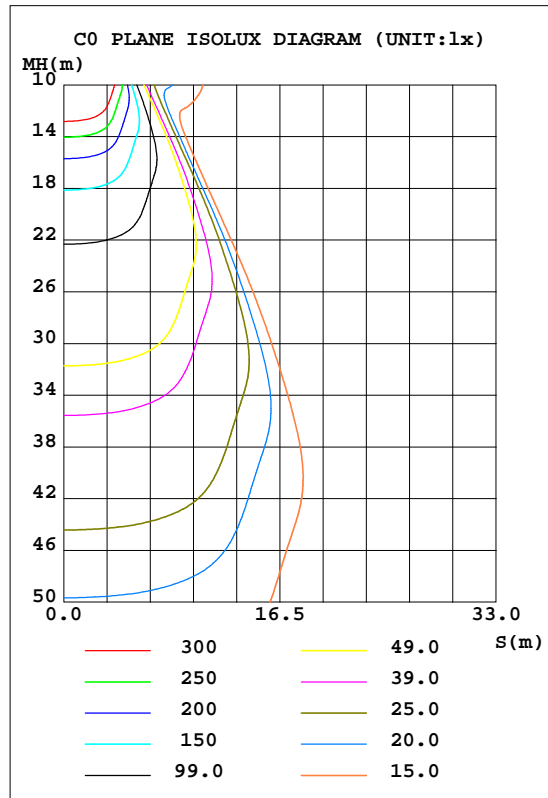


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.8V I:1.315A P:296.0W PF:0.9718 Lamp Flux:44820 lm		
NAME: K1000-50ST	TYPE:5630	WEIGHT:/
SPEC.:/	DIM.: /	SERIAL No.:
MFR.:	SUR.:/	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 151.4 lm/W			
MODEL	K1000-50ST	I _{max} (cd)	49730	S/MH(C0/180)	0.77
NOMINAL POWER(W)	296.0	LOR(%)	100.0	S/MH(C90/270)	0.74
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	44820	h UP,DN(C0-180)	1.4,48.6
NOMINAL FLUX(lm)	44820	CIE CLASS	DIRECT	h UP,DN(C180-360)	1.7,48.2
LAMPS INSIDE	1	h up(%)	3.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	h down(%)	96.9	CIBSE SHR MAX	0.75

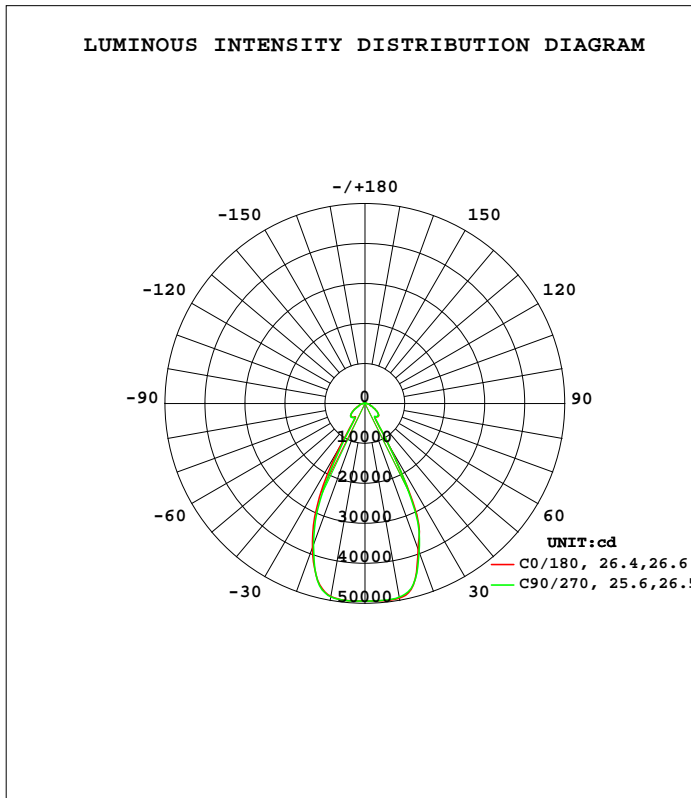

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping
 Date:2023-09-14

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]