
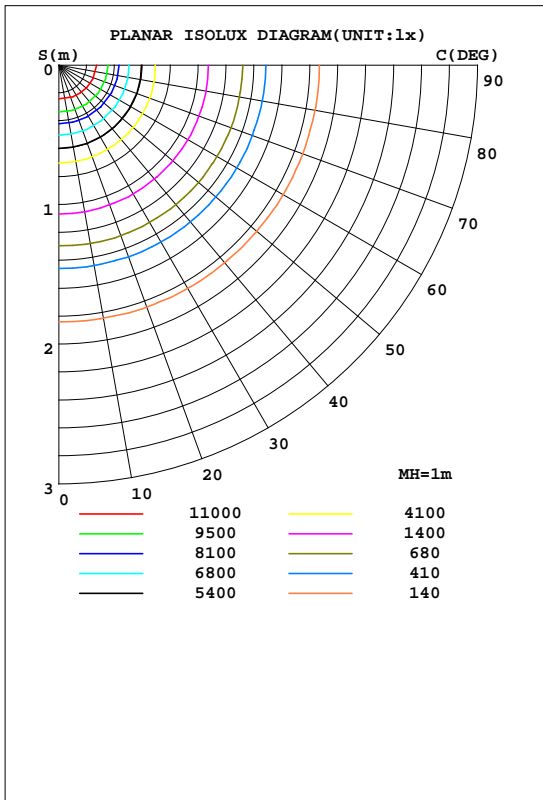


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:200.1V I:0.8038A P:149.5W PF:0.9690 Lamp Flux:23130 lm		
NAME: K700-50HT	TYPE:5630	WEIGHT:/
SPEC.:/	DIM.: /	SERIAL No.:
MFR.:	SUR.:/	PROTECTION ANGLE:/

DATA OF LAMP		PHOTOMETRIC DATA Eff: 154.7 lm/W			
MODEL	K700-50HT	I _{max} (cd)	13749	S/MH(C0/180)	1.06
NOMINAL POWER(W)	149.5	LOR(%)	100.0	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	23130	h UP, DN(C0-180)	1.5, 45.2
NOMINAL FLUX(lm)	23130	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.8, 51.5
LAMPS INSIDE	1	h up(%)	3.3	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	h down(%)	96.7	CIBSE SHR MAX	1.15

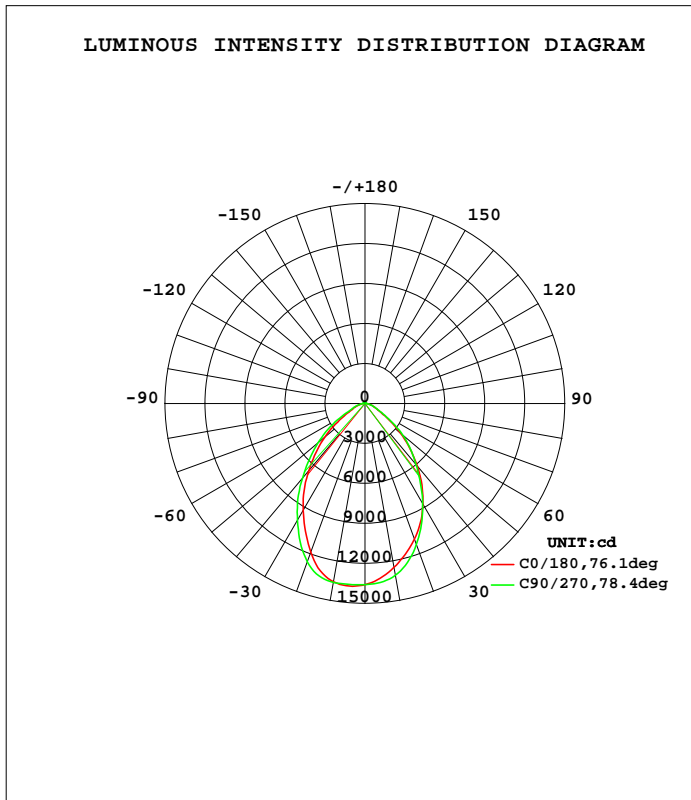

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping
 Date:2023-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]