
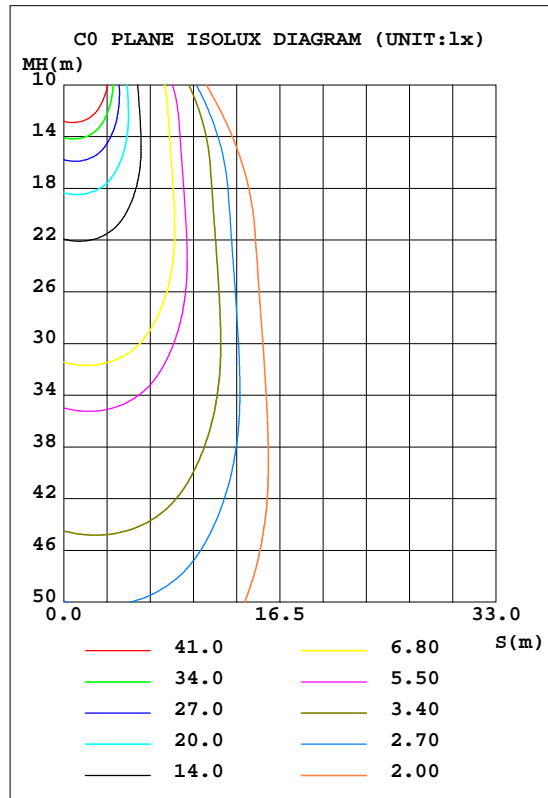


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|---|-----------------|------------------------|
| Test:U:200.0V I:0.1962A P:38.4W PF:0.9784 Lamp Flux:4320x1 lm | | |
| NAME: SNB40-50ST | TYPE:SNB40-50ST | WEIGHT:/ |
| SPEC.:/ | DIM.: / | SERIAL No.:LM161012003 |
| MFR.: | SUR.:/ | PROTECTION ANGLE:/ |

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 112.5 lm/W | | | |
|------------------|------------|----------------------------------|--------|--------------------|-----------|
| MODEL | SNB40-50ST | I _{max} (cd) | 6829 | S/MH(C0/180) | 0.54 |
| NOMINAL POWER(W) | 38.4 | LOR(%) | 100.0 | S/MH(C90/270) | 0.66 |
| RATED VOLTAGE(V) | 200 | TOTAL FLUX(lm) | 4320 | h UP, DN(C0-180) | 1.3, 53.3 |
| NOMINAL FLUX(lm) | 4320 | CIE CLASS | DIRECT | h UP, DN(C180-360) | 1.6, 43.8 |
| LAMPS INSIDE | 1 | h up(%) | 2.9 | CIBSE SHR NOM | 0.50 |
| TEST VOLTAGE(V) | 200 | h down(%) | 97.1 | CIBSE SHR MAX | 0.65 |

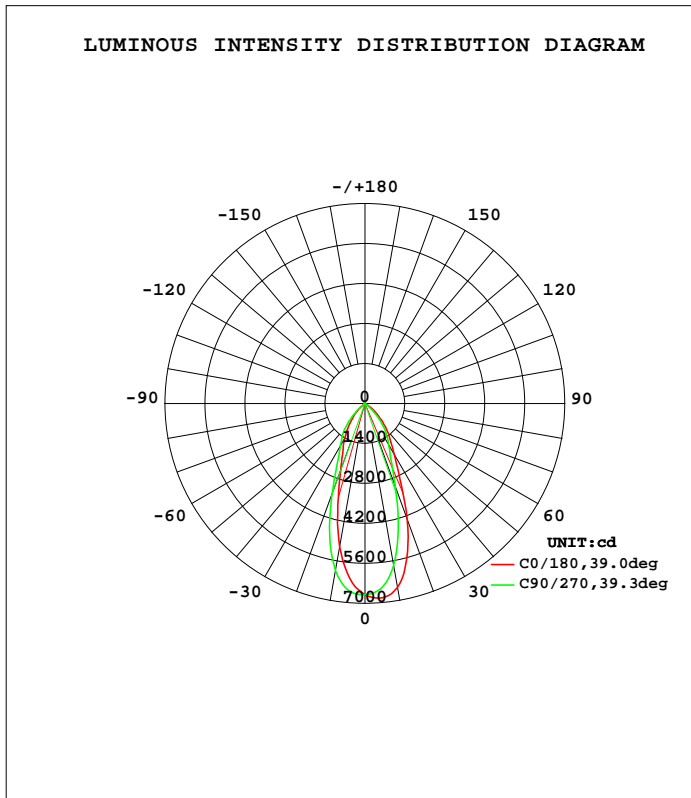

C Range: 0 - 360DEG
 C Interval: 90.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Liuyanping
 Test Date:

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.288
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks: