
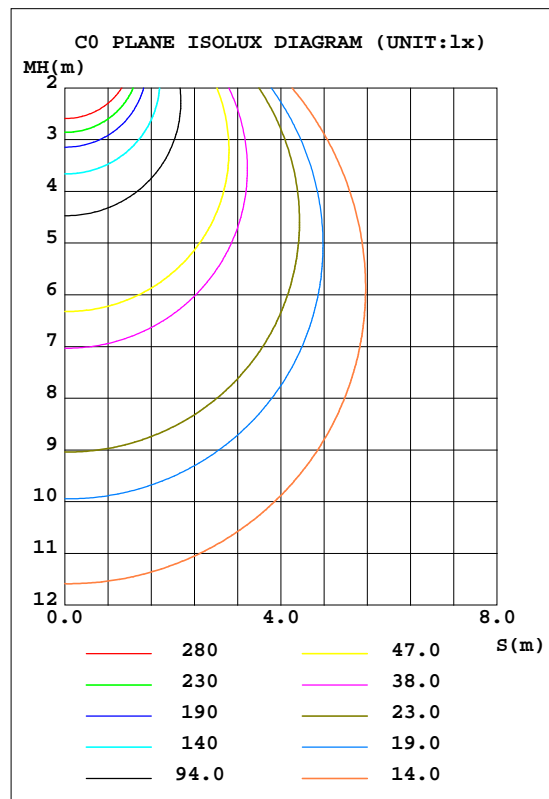


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:101.76V I:0.3906A P:39.428W PF:0.9920 Freq:59.98Hz Lamp Flux:5400x1 lm		
NAME: SNE39-40-27DK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 135.0 lm/W			
MODEL	SNE39-40-27DK	I <sub>max</sub> (cd)	1862	S/MH(C0/180)	1.22
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	100	TOTAL FLUX(lm)	5400	h UP, DN(C0-180)	3.2,46.6
NOMINAL FLUX(lm)	5400	CIE CLASS	DIRECT	h UP, DN(C180-360)	3.6,46.6
LAMPS INSIDE	1	h up(%)	6.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	100	h down(%)	93.2	CIBSE SHR MAX	1.35

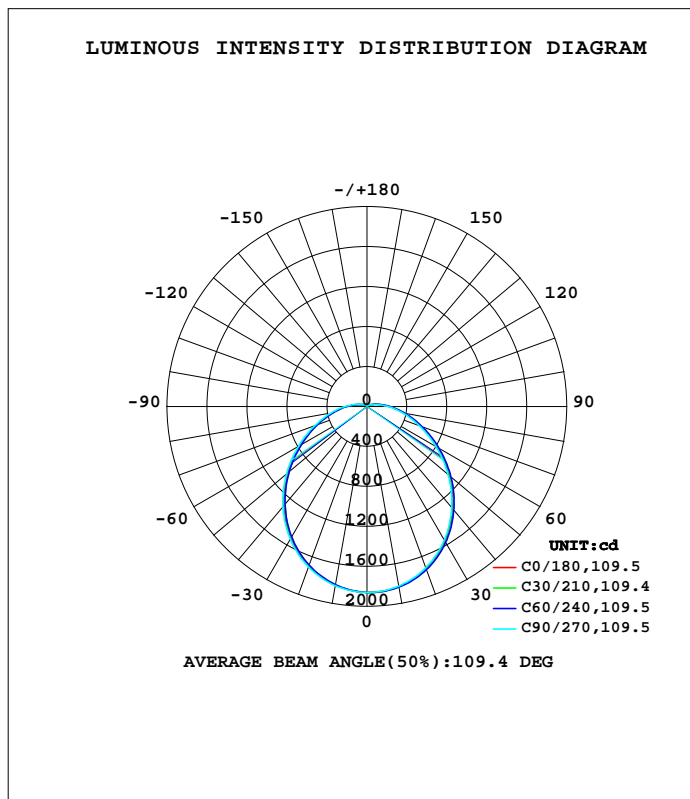

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:QA1  
 Test Date:

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.401  
 Humidity:65.0%  
 Test Distance:7.200m [K=1.0000]  
 Remarks: