
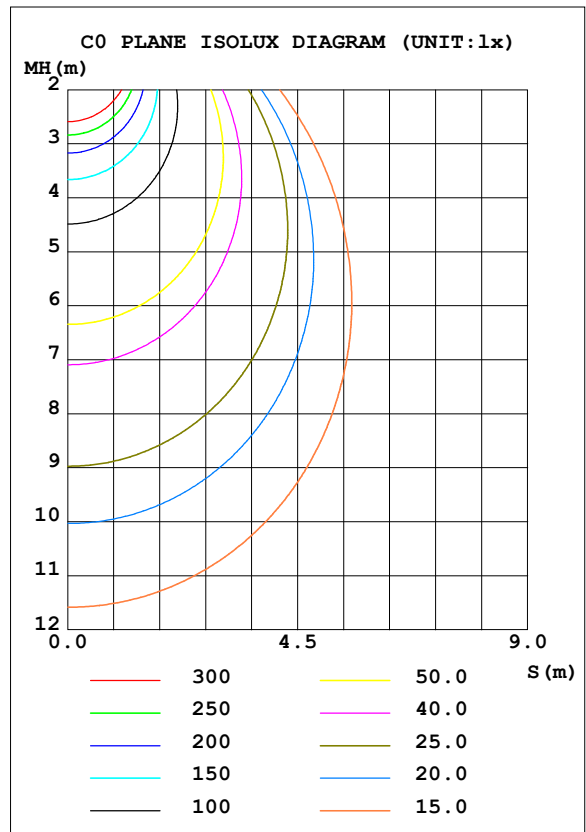


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:100.90V I:0.3910A P:40.0W PF:0.9930 Freq:50.00Hz Lamp Flux:6000x1 lm		
NAME: SNE39-40-50DK	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 150.0 lm/W			
MODEL	SNE39-40-50DK	I <sub>max</sub> (cd)	2012	S/MH (C0/180)	1.23
NOMINAL POWER (W)	40.0	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	100.9	TOTAL FLUX (lm)	6000	η UP, DN (C0-180)	2.9, 47.5
NOMINAL FLUX (lm)	6000	CIE CLASS	DIRECT	η UP, DN (C180-360)	2.8, 46.8
LAMPS INSIDE	1	η up (%)	5.7	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	100.9	η down (%)	94.3	CIBSE SHR MAX	1.35

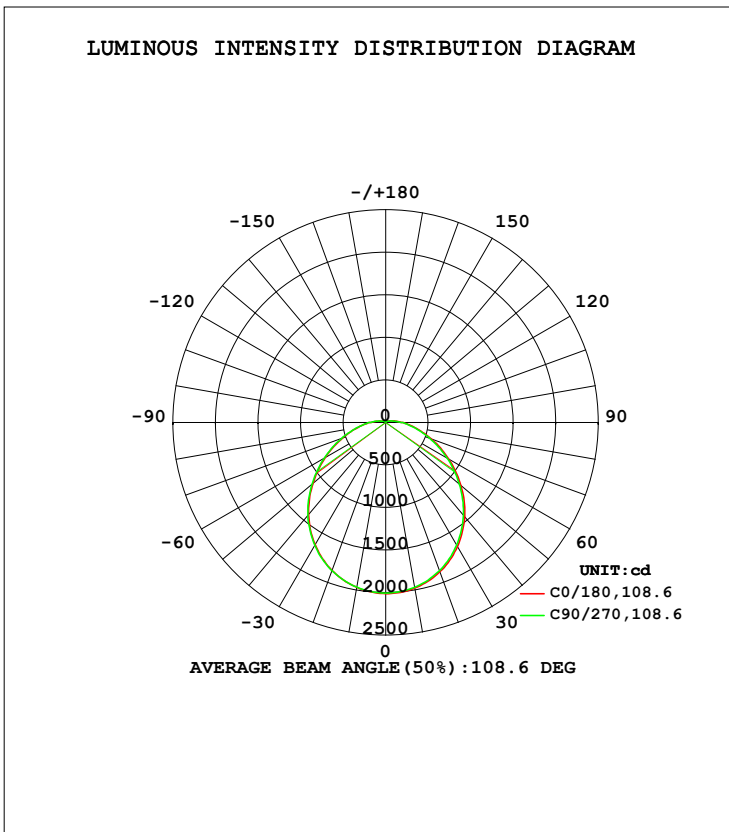

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 20.4DEG  
 Operators:  
 Test Date: 2023-03-17

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.402  
 Humidity: 32%  
 Test Distance: 7.950m [K=1.0000]  
 Remarks: